

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	MV	2022/3/26	NV

TECHNICAL DATA

► Electrical Characteristic

Frequency Range	DC~3GHz
Impedance	50 Ohms
Mating Cycles	500 min

► Material & Finishing


Center Conductor	Phosphor Bronze & Brass, Gold Plating
Outer Conductor	Brass, Nickel Plating
Insulators	PTFE

► Mechanical

Weight	80 g
--------	------

► Environmental

Temperature Range	-65°C~+165°C
-------------------	--------------

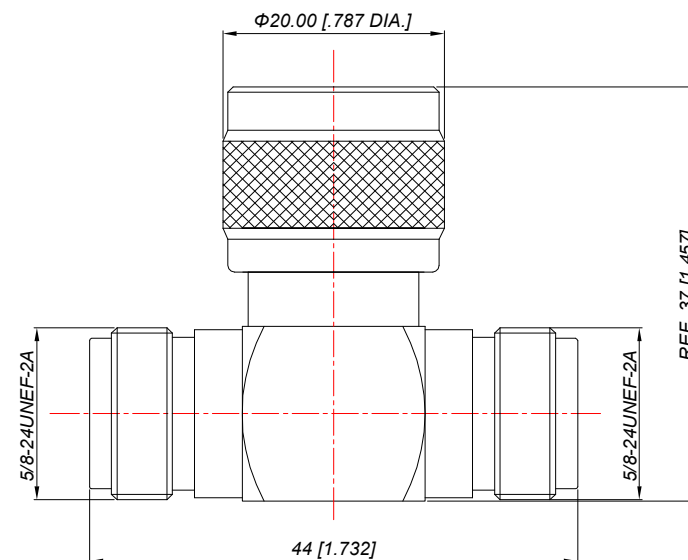

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: MV 26/03/22		
ENGINEER: MV 26/03/22		
APPROVED: NV 26/03/22		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:

Coaxial Tee Adapter, N-Female to
N-Male to N-Female, Right Angle,
DC~3GHz

PART No.:

AM401199



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------