

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	MV	2022/3/26	NV

TECHNICAL DATA

► Electrical Characteristic

Frequency Range	DC~18GHz
Impedance	50 Ohms
VSWR	1.2 max
Insertion Loss	0.04√f(GHz)dB max
Dielectric Withstand Voltage	2000Vrms
Contact Resistance	Center Contact: 3mΩ max Outer Contact: 5mΩ max
Insulation Resistance	5000MΩ min
Mating Cycles	500 min

► Material & Finishing


Center Conductor	Beryllium Copper, Gold Plating
Outer Conductor	Stainless Steel, Passivated
Insulators	PEI

► Mechanical

Force to Engage/Disengage	0.23Nm max
Recommended Mating Torque	N: 0.79Nm~1.13Nm; TNCA: 0.45Nm~0.68Nm

► Environmental

Vibration	Method 204, Test Condition D
Shock	Method 213, Test Condition I
Thermal Shock	Method 107, Test Condition B
Corrosion (Salt Spray)	Method 101, Test Condition B
Moisture Resistance	Method 106, Insulation Resistance≥200MΩ

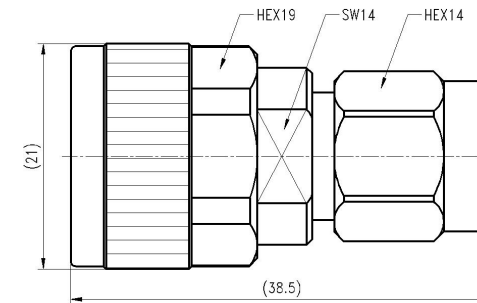

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: MV 26/03/22			TITLE: Coaxial Adapter, N-Male to TNCA-Male, Straight, DC~18GHz		AMT RF			
ENGINEER: MV 26/03/22								
APPROVED: NV 26/03/22								
TOLERANCE UNLESS OTHERWISE SPECIFIED			PART No.: AM401200		DIMENSIONS IN MILLIMETERS(mm)			
x	±0.50	[0.019"]						
.x	±0.20	[0.008"]						
.xx	±0.10	[0.004"]						
ANGLES	±1°							
					SIZE:	SCALE:	SHEET:	REV:
					A4		1/1	A

x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	