

REV	DESCRIPTION OF REVISION	By	DATE	APPROVED
A	INITIAL RELEASE	C. Cai	2025/12/3	C. Cn


TECHNICAL DATA

► Electrical Characteristic

Frequency Range	DC~6GHz
Impedance	50 Ohms
VSWR	1.1:1 max@3GHz, 1.2:1 max@6GHz
Insertion Loss	0.1dB max
PIM	-160dBc max
Dielectric Withstand Voltage	2500Vrms, 50Hz, at sea level
Insulation Resistance	5000MΩ min
Mating Cycles	500 min

► Material & Finishing

Center Conductor	Phosphor Bronze, Ag
Outer Conductor	Brass, Tri-Alloy
Insulators	PTFE

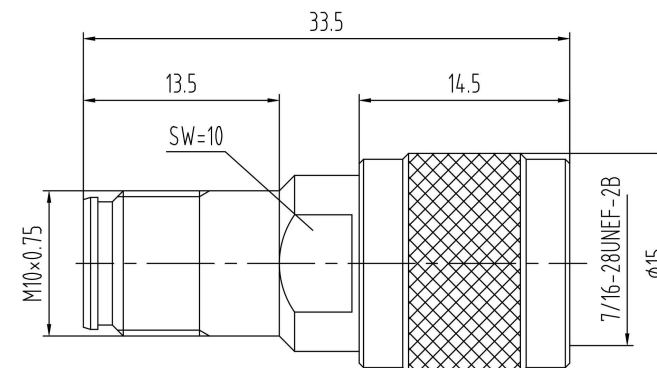

Notes:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: L. M 03/12/25		
ENGINEER: J. Z 03/12/25		
APPROVED: C. 03/12/25		
TOLERANCE UNLESS OTHERWISE SPECIFIED		
x	±0.50	[0.019"]
.x	±0.20	[0.008"]
.xx	±0.10	[0.004"]
ANGLES	±1°	

TITLE:
Coaxial Adapter,
TNC-Male to NEX10-
Female, Straight,
DC~6GHz

PART No.:
AM401266



DIMENSIONS IN MILLIMETERS(mm)

SIZE: A4	SCALE:	SHEET: 1/1	REV: A
-------------	--------	---------------	-----------